



# P8 Grab Handle

## Surface mount


- Two styles and color options available
- Concealed installation
- Four standard lengths

### Material and Finish

Aluminum, anodized, clear or black

### Performance Details

Maximum working load: 1500 N  
(335 lbf)



### Installation Notes

Screws not supplied.

Calculate screw length using the following formula:

Door thickness + 5 (.20)

Maximum tightening torque of mounting screws: 1.7 N·m  
(15 in·lbf)

### Part Number Selection


For visual identification:

M4 products have a counterbored hole.

8-32 products have a countersunk hole

### Part Number

Oval profile handles are currently offered in a 10-32 thread only.

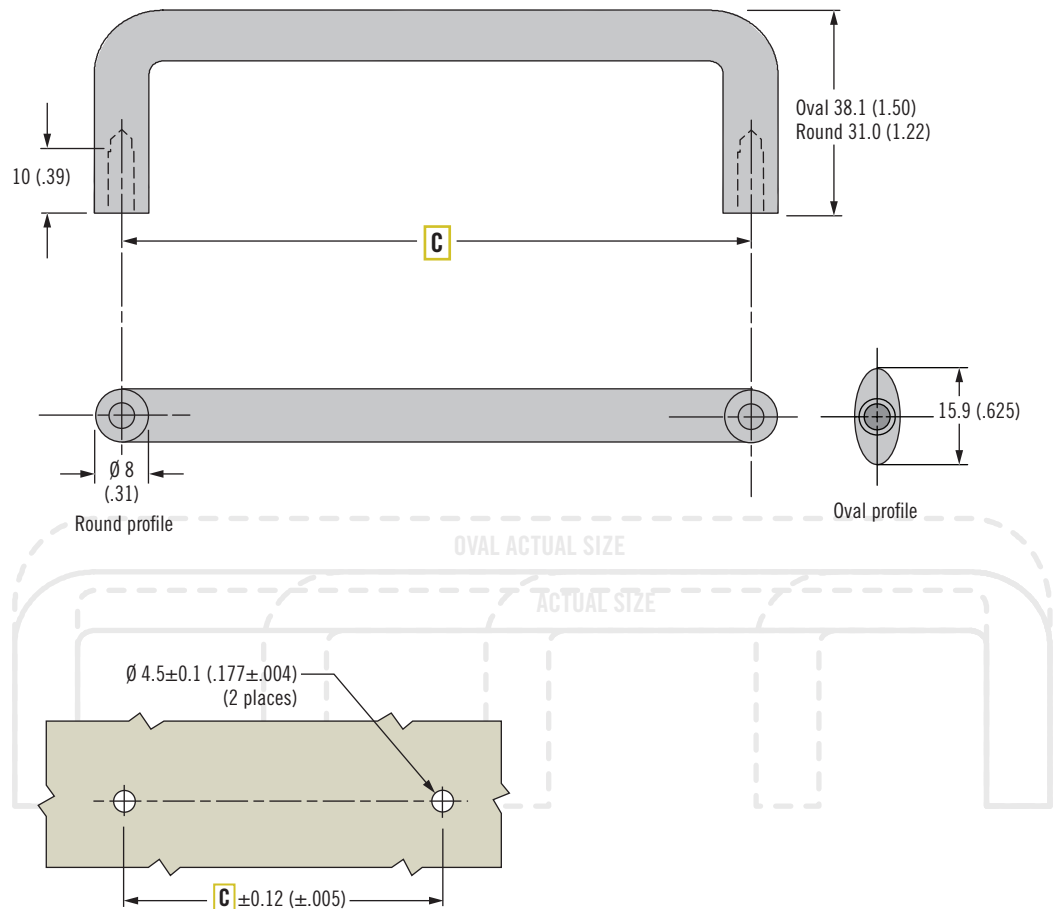

### Round Profile

P8 - C - 31 - T - 1 F - P

#### C Centers

030 30 (1.18) Hole centers

064 64 (2.52) Hole centers

096 96 (3.78) Hole centers

128 128 (5.04) Hole centers

#### T Tapped mounting hole

08 Imperial 8-32

M4 Metric M4 x 0.7

#### P Packing option

Omit for individual packaging (1 per bag)

3 Layer packaging contact Southco

#### F Finish

1 Clear anodized

5 Black anodized

### Oval Profile

Finish	Part Number		C
	Bulk Packaged	Individually Packaged (1 per bag)	
Clear anodized	P8-128-38-10V-11-3	P8-128-38-10V-11	128 (5.04)
Black anodized	P8-128-38-10V-15-3	P8-128-38-10V-15	