



HARDGRIP RIVET







Dome head

STEEL/STEEL

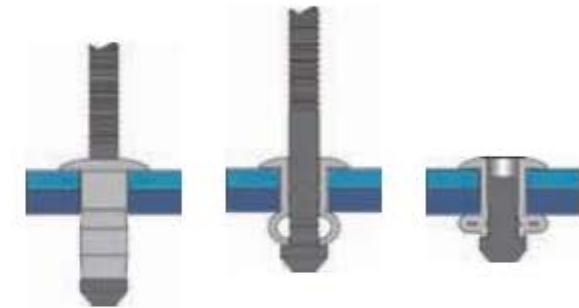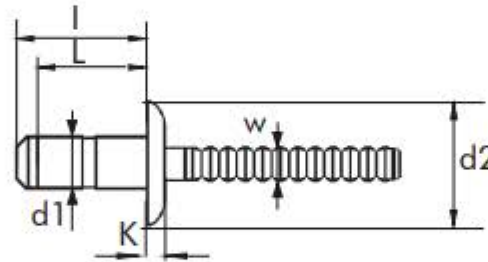

BODY: Steel Zincplated A3K
MANDREL: Steel Zincplated A3K



| d1 Ø mm | L Nominal mm |  mm | d2 Ø mm | K mm | W Ø mm | PACKAGING | | I Max. mm |  E mm MIN. MÁX. |  (N) |  (N) | REFERENCE |
|---------------|--------------------|-----------------------------------------------------------------------------------------|---------------|---------|--------------|----------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|-----------------|-------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|-------------|
| | | | | | |  Inner |  Outer | | | | | |
| 3,2 | 7,0 | 3,30-3,50 | 6,50 | 1,00 | 2,00 | 500 | 4.000 | 10,00 | 1,0 - 3,0 | 1700 | 1450 | 01894003207 |
| | 9,5 | | | | | 500 | 4.000 | 12,00 | 3,0 - 5,0 | 2000 | 1450 | 01894003210 |
| | 11,5 | | | | | 500 | 4.000 | 15,00 | 5,0 - 7,0 | 2400 | 1450 | 01894003212 |
| 4,0 | 7,5 | 4,10-4,30 | 7,70 | 1,30 | 2,60 | 500 | 4.000 | 10,50 | 1,0 - 3,0 | 2400 | 2800 | 01894004008 |
| | 8,5 | | | | | 500 | 4.000 | 11,50 | 2,0 - 4,0 | 2600 | 2800 | 01894004009 |
| | 9,5 | | | | | 500 | 3.000 | 12,50 | 3,0 - 5,0 | 3500 | 2800 | 01894004010 |
| | 12,5 | | | | | 500 | 3.000 | 15,50 | 5,0 - 7,0 | 4100 | 2800 | 01894004013 |
| 4,8 | 9,5 | 4,90-5,10 | 9,20 | 1,50 | 3,00 | 500 | 3.000 | 12,00 | 1,5 - 3,5 | 3500 | 3500 | 01894004809 |
| | 11,5 | | | | | 250 | 2.000 | 14,50 | 3,5 - 6,0 | 4200 | 3500 | 01894004812 |
| | 14,5 | | | | | 250 | 2.000 | 17,50 | 6,0 - 8,5 | 5600 | 3500 | 01894004815 |
| 6,0 | 10,5 | 6,10-6,30 | 12,00 | 2,00 | 4,00 | | 1.500 | 14,00 | 1,5 - 4,0 | 4200 | 5400 | G1894006010 |
| | 13,5 | | | | | | 1.500 | 17,00 | 3,0 - 6,0 | 5400 | 5400 | G1894006013 |
| | 16,5 | | | | | | 1.000 | 20,00 | 6,0 - 9,0 | 8500 | 5400 | G1894006016 |
| | 19,5 | | | | | | 1.000 | 23,00 | 9,0 - 12,0 | 8500 | 5400 | G1894006019 |

Tests according to EN ISO 14589

Note: Under request we do manufacture Hardgrip rivets with countersunk head (d2).

