
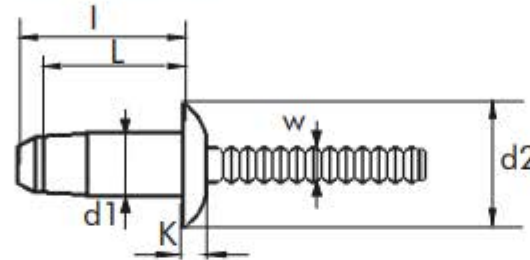






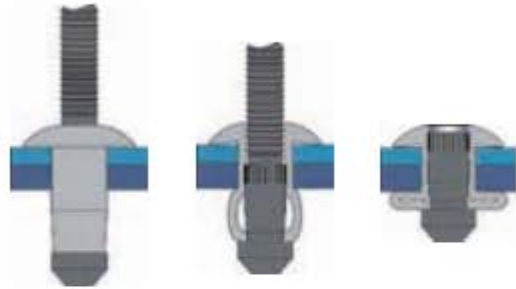

ALUMINIUM/ALUMINIUM

HARDLOCK RIVET Dome head

BODY: Aluminium Al Mg 2,5 (AW5052)

MANDREL: Aluminium



d1 Ø mm	L Nominal mm	 mm	d2 Ø mm	K mm	W Ø mm	PACKAGING		I Max. mm	 E mm MIN. MAX.	 (N)	 (N)	REFERENCE
						 Inner	 Outer					
6,4	10,5	6,70-6,90	13,10	2,60	4,20		1.500	15,0	2,8 - 4,8	5000	2800	G1881006410
	12,5						1.000	17,0	4,8 - 6,8	5200	2800	G1881006412
	14,5						1.000	19,0	6,8 - 8,8	5400	2800	G1881006414
	16,5						1.000	21,0	8,8 - 10,8	5400	2800	G1881006416
	18,5						1.000	23,0	10,8 - 12,8	5400	2800	G1881006418

Tests according to EN ISO 14589

