


STANDARD RIVET
Dome head

STAINLESS STEEL A2/STAINLESS STEEL A2

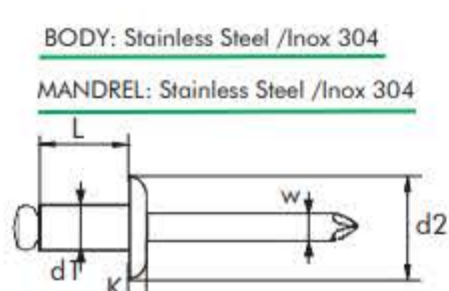

UNE - EN ISO 15983



d1 Ø mm	L Nominal mm	mm	d2 Ø mm	K mm	W Ø mm	PACKAGING		E MIN. mm MAX.	(N)	(N)	REFERENCE
						Inner	Outer				
2,4	6	2,50	5,00	0,60	1,50	1.000	8.000	2,0 - 3,5	1000	1250	01260002406
	8					1.000	8.000	3,5 - 5,5			01260002408
	10					1.000	8.000	5,5 - 7,5			01260002410
	12					500	4.000	7,5 - 9,5			01260002412
3,0	5	3,10	6,00	1,00	2,00	500	4.000	0,5 - 2,5	1800	2200	01260003005
	6					500	4.000	0,5 - 3,0			01260003006
	8					500	4.000	3,0 - 5,0			01260003008
	10					500	4.000	5,0 - 6,5			01260003010
	12					500	4.000	6,5 - 8,5			01260003012
3,2	6	3,30	6,40	1,00	2,10	500	4.000	0,5 - 3,0	1900	2500	01260003206
	8					500	4.000	3,0 - 5,0			01260003208
	10					500	4.000	5,0 - 6,5			01260003210
	12					500	4.000	6,5 - 8,5			01260003212
	15					500	4.000	8,5 - 12,0			01260003215
4,0	6	4,10	8,00	1,30	2,40	500	4.000	1,0 - 2,5	2700	3500	01260004006
	8					500	4.000	2,5 - 4,5			01260004008
	10					500	4.000	4,5 - 6,5			01260004010
	12					500	3.000	6,5 - 8,5			01260004012
	14					500	3.000	8,5 - 10,0			01260004014
	16					500	3.000	10,0 - 12,0			01260004016
	18					500	3.000	12,0 - 14,0			01260004018
	20					500	3.000	14,0 - 16,0			01260004020
	25					250	2.000	16,0 - 20,0			01260004025
	4,8	8	4,90	9,00	1,60	3,10	500	3.000	2,0 - 4,0	4000	5000
10						500	3.000	4,0 - 6,0			01260004810
12						250	2.000	6,0 - 8,0			01260004812
14						250	2.000	8,0 - 9,5			01260004814
16						250	2.000	9,5 - 11,0			01260004816
18						250	1.500	11,0 - 13,0			01260004818
20						250	1.500	13,0 - 16,0			01260004820
25						200	1.200	16,0 - 19,0			01260004825
30						200	1.200	19,0 - 24,0			01260004830
35						150	900	24,0 - 29,0			01260004835
40						150	900	29,0 - 34,0			01260004840
5,0		8	5,10	9,00	1,60	3,10	500	3.000	2,0 - 4,0	4700	5800
	10					500	3.000	4,0 - 6,0			01260005010
	12					250	2.000	6,0 - 8,0			01260005012
	14					250	2.000	8,0 - 9,5			01260005014
	16					250	2.000	9,5 - 11,0			01260005016
6,4	12	6,50	12,50	2,20	3,85	250	1.500	2,0 - 6,0	7000	9000	01260006412
	15					250	1.500	6,0 - 9,0			01260006415
	18					200	1.200	9,0 - 12,0			01260006418
	20					150	900	12,0 - 14,0			01260006420
	25					150	900	14,0 - 18,0			01260006425

Tests according to EN ISO 14589

Note: This range of rivets is available in an infinity of lacquering under request.

STAINLESS STEEL A2/STAINLESS STEEL A2

STANDARD RIVET
Countersunk head 120°

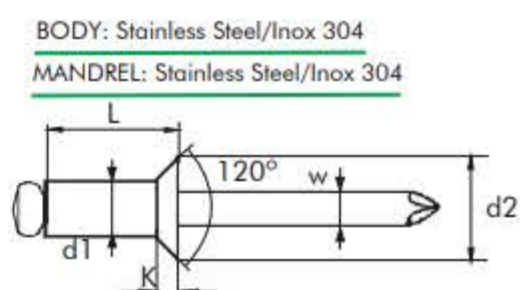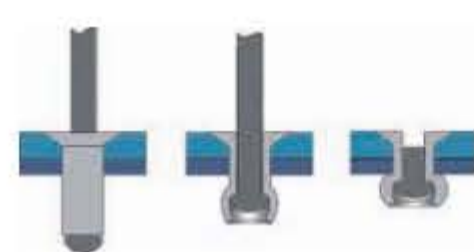


UNE - EN ISO 15984

d1 Ø mm	L Nominal mm	mm	d2 Ø mm	K mm	W Ø mm	PACKAGING		E MIN. mm MAX.	(N)	(N)	REFERENCE
						Inner	Outer				
3,2	6	3,30	6,30	1,00	2,10	500	4.000	1,5 - 3,0	1900	2500	01270003206
	8					500	4.000	3,0 - 5,5			01270003208
	10					500	4.000	5,5 - 6,5			01270003210
	12					500	4.000	6,5 - 8,5			01270003212
4,0	8	4,10	7,60	1,30	2,40	500	4.000	2,5 - 4,5	2700	3500	01270004008
	10					500	4.000	4,5 - 6,5			01270004010
	12					500	3.000	6,5 - 8,5			01270004012
	14					500	3.000	8,5 - 10,0			01270004014
4,8	8	4,90	9,50	1,40	3,10	500	3.000	2,5 - 4,0	4000	5000	01270004808
	10					500	3.000	4,0 - 6,0			01270004810
	12					250	2.000	6,0 - 8,0			01270004812
	14					250	2.000	8,0 - 10,0			01270004814
	18					250	1.500	12,0 - 14,0			01270004818

Tests according to EN ISO 14589

STAINLESS STEEL A2/STAINLESS STEEL A2

STANDARD RIVET
Large head

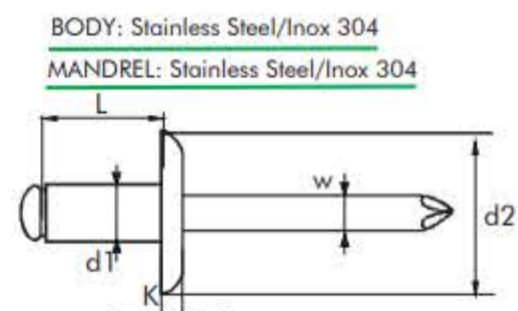

d1 Ø mm	L Nominal mm	mm	d2 Ø mm	K mm	W Ø mm	PACKAGING		E MIN. mm MAX.	(N)	(N)	REFERENCE
						Inner	Outer				
3,2	10	3,30	9,50	1,40	2,10	500	4.000	5,0 - 6,5	1900	2500	01310003210
4,0	10	4,10	12,00	1,80	2,40	500	3.000	4,5 - 6,5	2700	3500	01310004010
	13					250	2.000	6,5 - 9,5			01310004013
	16					250	2.000	9,5 - 12,0			01310004016
4,8	8	4,90	14,00	2,20	3,10	250	1.500	1,5 - 3,0	4000	5000	01311004808
4,8	8	4,90	16,00	2,20	3,10	250	1.500	2,0 - 4,0	4000	5000	01310004808
	10					250	1.500	4,0 - 6,0			01310004810
	12					250	1.500	6,0 - 8,0			01310004812
	14					250	1.500	8,0 - 10,0			01310004814
	16					200	1.200	9,5 - 11,0			01310004816
	18					150	900	11,0 - 13,0			01310004818
	20					150	900	13,0 - 16,0			01310004820
	22					100	600	16,0 - 18,0			01310004822
	25					100	600	16,0 - 19,0			01310004825
	30					100	600	19,0 - 24,0			01310004830
	35					100	600	24,0 - 29,0			01310004835

Tests according to EN ISO 14589

Note: This range of rivets is available in an infinity of lacquering under request.

