

SEALED RIVET

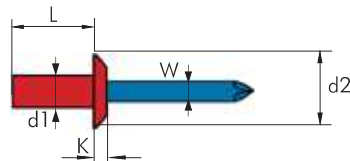
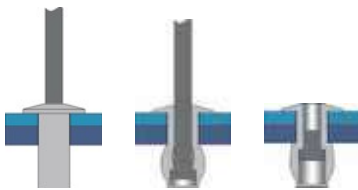
The joints are completely water tight which avoids leakage of liquids or vapours due to the locking of the mandrel inside the rivet body.

- They guarantee a solid fixation, they do not loosen due to dynamic stresses.
- The mandrel is completely locked within the head, avoiding electrical problems or pounding.
- It does not deform surfaces after the riveting process is finished (painted, glazed, etc.).
- Good performance with temperature variations.






SEALED RIVET Dome head

ALUMINIUM/STEEL
Al Mg 5 Lubricated



UNE - EN ISO 15973

d1 Ø mm	L Nominal mm	 mm	d2 Ø mm	K mm	W Ø mm	PACKAGING		E		 (N)	 (N)	REFERENCE	
						Inner	Outer	MIN. mm	MAX				
3,2	6,5	3,30	6,40	1,00	1,65	500	4.000	0,5	- 2,0	1100	1450	01110003206	
	7,5					500	4.000	0,5	- 3,2				01110003207
	8,0					500	4.000	2,0	- 3,5				01110003208
	9,5					500	4.000	3,5	- 5,0				01110003209
	11,0					500	4.000	5,0	- 6,5				01110003211
12,5	500	4.000	6,5	- 8,0	01110003212								
4,0	8,5	4,10	7,90	1,40	2,20	500	4.000	0,5	- 3,5	1600	2200	01110004008	
	9,5					500	4.000	3,5	- 5,0				01110004010
	11,0					500	4.000	5,0	- 6,5				01110004011
	12,5					500	3.000	6,5	- 8,0				01110004013
	14,5					500	3.000	8,0	- 10,0				01110004015
4,8	8,5	4,90	9,30	1,70	2,65	500	3.000	0,5	- 3,5	2200	3100	01110004808	
	9,5					500	3.000	3,5	- 5,0				01110004810
	11,0					500	3.000	5,0	- 6,5				01110004811
	13,0					250	2.000	6,5	- 8,0				01110004813
	14,5					250	2.000	8,0	- 9,5				01110004814
	16,0					250	2.000	9,5	- 11,0				01110004816
	18,0					250	1.500	11,0	- 13,0				01110004818
	21,0					250	1.500	13,0	- 16,0				01110004821
25,0	200	1.200	16,0	- 20,0	01110004825								
6,4	12,5	6,50	12,50	2,40	3,60	250	1.500	1,5	- 6,5	3600	4900	01110006412	
	15,5					200	1.200	6,5	- 9,5				01110006415

Tests according to EN ISO 14589

